

L.dz. DN/DF/FL/KW/0284/23  
Znak sprawy: P/18/2023

Świnoujście, 12.06.2023r.

**wg rozdzielnika**

Dotyczy: przetargu nieograniczonego na zakup i dostawę wymienników ciepła do PEC Sp. z o.o. w Świnoujściu.

Przedsiębiorstwo Energetyki Ciepłej Sp. z o.o. w Świnoujściu odpowiada na pytania oferenta j/n:

1. Zwracam się z pytaniem czy wyrażają Państwo zgodę na zastosowanie zamienników do nieprodukowanych już wymienników z poz. 1 i 2 (Sondex)?

I tak odpowiednio dla **poz.1** i **poz.2**:

jest wymiennik S7A – proponowany **zamiennik**: SR2 MGS-16/26 – I stopień

jest wymiennik S14A – proponowany **zamiennik**: SR2 MGS-16/33 – II stopień

*Odp.: Nie wyrażamy zgody na zastosowanie zaproponowanych przez Państwa zamienników.*

*Mają one inny rozstaw przyłączy, co wiąże się z koniecznością przerobienia obecnej instalacji.*

*Przy doborze zamienników należy kierować się załączoną kartą katalogową Sondexu ukazującą akceptowalne przez nas rozstawy przyłączy na obecnie użytkowanych wymiennikach.*

Przewodnicząca  
Komisji Przetargowej

Katarzyna Mikulska-Warmbier

Otrzymują:

1. Adresat

2. FL

3. Strona [www.pec.swinoujscie.pl](http://www.pec.swinoujscie.pl)



**SONDEX**®

## ► S7A - S14A - S20A Plate Heat Exchangers

### Recommended Applications:

The S7A, S14A and S20A range of Sondex plate heat exchangers is specially designed for the HVAC area, the geothermal-, marine-, and heat recovery area as well as the food, industrial and chemical market.

### Design Principle:

The Sondex type S7A, S14A and S20A plate range with lengths up to 1,0 m (3,8 ft) and a "long" thermal pattern will cover many duties up to 50 m<sup>3</sup>/h (220 gpm) in a single pass solution, meaning that all the connections are on the head side. This will ensure easy pipe- and service work, and by dismantling the exchanger for service, no pipes need to be removed.

The heat transfer is obtained, when the warm medium transfers energy through the thin, strong flow plates between the channels and delivers it to the cold opposing medium without mixing the two media. Counter-current flow creates the optimal efficiency. The plate- and inlet design allows effective, easy CIP (Cleaning in Place) of all "flow" surfaces.


### Flow plates:

The corrugated "herringbone" pattern ensures turbulent flow in the whole effective area. Furthermore, this pattern brings "metallic" contact between the plates, and together with "Sonder Lock" locking devices on the gaskets, the plate pack is easily assembled. The plate pack is held firm and safely between the fixed head and movable follower of the frame.


### Data Required for Correct Quotation:

- Duty
- Flow rate
- Temperature
- Type of media
- Working pressure
- Working Temperature
- Pressure loss
- Thermodynamic properties

Above data determines the choice of heat exchanger.

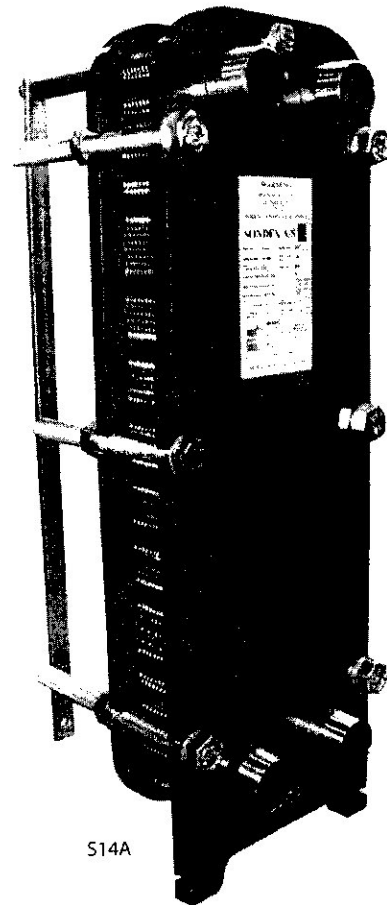

S14A

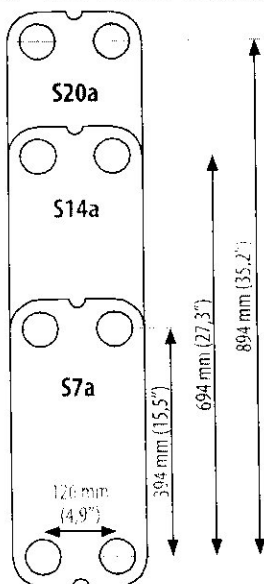

For exact dimensions of the PHE please refer to the dimension drawing

### Technical Information

#### Frame:

- Painted frame, colour RAL 5010 (available in other colours)
  - Stainless steel frame, designed for the food and dairy industry.
- Both frames comes with clamping bolts placed around the frame edge.

#### Design Pressure:

- Painted frames: 1.6/2.5 MPa. (232/362 PSI)
- Stainless steel frame: 1.6 MPa. (232 PSI)

#### Intermediate Frames:

Intermediate frames and corner blocks for IS and FS frames in stainless steel.

#### Construction Standard:

- EN13445 (PED 2014/68/EU)
- ASME sec VIII, Div. 1

#### Connections:

- DN50/2" flanges. Carbon steel, rubberlined or clad with AISI 316.
  - 2" pipe or threaded pipe in stainless steel or titanium
  - 2"/DN50 dairy pipe or union.
- According to all known standards.

#### Plate Material:

AISI 316, 254 SMO and titanium. Also 2 x 0.4 mm "Sonder Safe" plates, for food and industry. Other materials available on request.

#### Gaskets:

The gasket is the unique non-glued "Sonder lock" gasket which locks the plates together with strong rubber buttons, so that the plates are strongly guided during the assembly of the plate heat exchanger. Materials: NBR, EPDM and Viton. Other materials available on request.

#### Extra Equipment:

- Safety cover in stainless steel
- Insulating jacket
- Assembling spanner
- Foundation feet
- Instrument flange
- Thermometer and manometer